


PROCESS/TEMPERATURE ALARM SWITCH MODULE

Two Form C (SPDT) Switches, Small Size, Mounts Easily on 35 mm DIN Rail

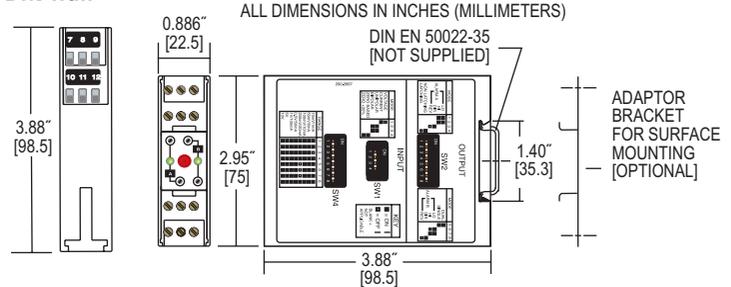

The **SERIES SC1** Limit/Alarm Switch Modules are on-off or limit switches with selectable process signal. Each unit has two form C (SPDT) relays which can operate independently, or be logically connected to operate as a DPDT output.

FEATURES/BENEFITS

- Accepts current, voltage, thermocouple, or RTD inputs
- Mounts on standard 35 mm DIN rail
- Two color LED indicator to indicate the status of each output relay
- Programmable input type, scale range, output action, and output type

APPLICATIONS

- Stand alone CO monitoring in parking garage
- Industrial processing equipment

MODEL CHART		
Model	Description	Power Supply
SC1090	4 to 20 mA, 10 to 50 mA, 0 to 20 mA, 0 to 10 V, -10 to 10 mV	85 to 265 VDC/VAC
SC1290	Thermocouple type J, K, R, S, T, E	85 to 265 VDC/VAC
SC1490	RTD Pt1000 Ni100, Ni120, Cu10, Ni-Fe1000, Ni-Fe2000	85 to 265 VDC/VAC
SCL1090	4 to 20 mA, 10 to 50 mA, 0 to 20 mA, 0 to 10 V, -10 to 10 mV	12 to 24 VDC/VAC
SCL1290	Thermocouple type J, K, R, S, T, E	12 to 24 VDC/VAC
SCL1490	RTD Pt1000 Ni100, Ni120, Cu10, Ni-Fe1000, Ni-Fe2000	12 to 24 VDC/VAC

SPECIFICATIONS

Input: See table.
Power Supply: SC models: 85 to 265 VDC/VAC, 50 to 400 Hz; SCL models: 12 to 24 VDC/VAC, 50 to 400 Hz.
Isolation: 1500V rms between outputs, input, and power.
Set Points: Adjustable 0 to 100% of span.
Deadband: Adjustable 0.25% to 100% of span.
Drift: $\pm 0.02\%/^{\circ}\text{C}$ typical $\pm 0.05\%/^{\circ}\text{C}$ maximum.
Ambient Temperature Range: Operating: 32 to 131°F (0 to 55°C); Storage: -40 to 176°F (-40 to 80°C).
Excitation Current: (SC1490) Cu10 $\Omega = 5 \text{ mA}$; Pt1 100 Ω , Ni 100 Ω , Ni 120 $\Omega = 500 \mu\text{A}$; Pt1 500 Ω , NiFe 1000 $\Omega = 100 \mu\text{A}$; Pt1 1000 $\Omega = 50 \mu\text{A}$.

Lead Compensation Error: (SC1490) $\approx 0.02\%/\Omega$.
Open Lead Protection: (SC1490) upscale only.
Input Impedance: SC1090: Voltage input = 1 M Ω , current input = 10 Ω ; SC1290: 3 M Ω .
Sensor Burnout Protection: Selectable.
Relay Output: Form C, SPDT, one per set point, 5A @ 250 VAC, resistive.
Latch Circuit Reset: Automatic at power up. Manual with reset switch on front of module.
Indicators: One dual color LED per set point. Red = relay on, green = relay off.
Wiring Terminals: Screw driven compression type.

ACCESSORIES

Model	Description
A-360	Aluminum DIN rail 1 m